

TEXMO



أداء يمكنك الوثوق
PERFORMANCE YOU CAN TRUST



Induction Motor




Applications

- Induction motor is totally enclosed and fan cooled (TEFC Motor)
- Induction motor have outstanding performance, such as high efficiency, energy-saving, high starting torque, low noise, little vibration, reliable operation, re-winding leaf and easy maintenance.
- Induction motor is used for multi-purpose such as:
 - Industrial.
 - Domestic and agriculture.
 - Machinery equipment.

Operating Condition

- Rated Voltage : 220V (Single Phase) 380V (Three phase)
- Rated frequency : 50Hz
- RPM 1400 , 2900
- IP 54
- Duty:- S1

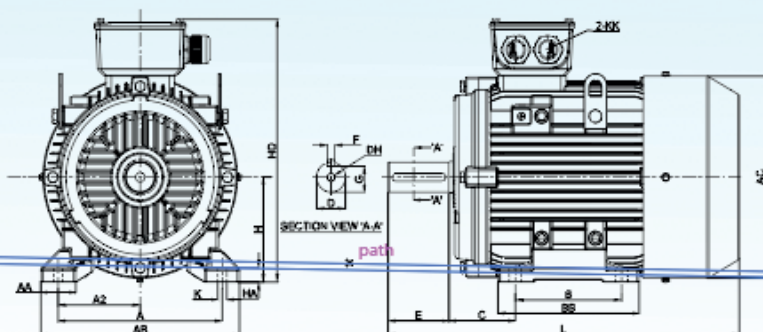



Model	A	AA	AB	BB	HA	AC	HD	B	C	D	DH	E	F	G	H	K	KK		L
																	METRIC	PG	
TIM-1.5S4	140	37	175	150	10	175	230	125	56	24	M6 x 18	50	8	20	90	10	2-M25x1.5	2-PG16	340
TIM-2S4	140	37	175	150	10	175	230	125	56	24	M6 x 18	50	8	20	90	10	2-M25x1.5	2-PG16	340
TIM-3S4	160	40	200	172	11	196	260	140	63	28	M10 x 22	60	8	24	100	12	2-M32x1.5	2-PG21	385
TIM-1.5S2	125	35	165	125	9	160	215	100	50	19	M6 x 16	40	6	15.5	80	10	2-M20x1.5	2-PG16	290
TIM-2S2	140	37	175	150	10	175	230	125	56	24	M6 x 18	50	8	20	90	10	2-M25x1.5	2-PG16	340
TIM-3S2	140	37	175	150	10	175	230	125	56	24	M6 x 18	50	8	20	90	10	2-M25x1.5	2-PG16	340
TIM-1T2	125	35	165	125	9	155	215	100	50	19	M6 x 16	40	6	15.5	80	10	2-M20x1.5	2-PG16	287
TIM-1.5T2	125	35	165	125	9	155	215	100	50	19	M6 x 16	40	6	15.5	80	10	2-M20x1.5	2-PG16	287
TIM-2T2	140	37	175	125	10	175	230	100	56	24	M8 x 18	50	8	20	90	10	2-M25x1.5	2-PG16	315
TIM-3T2	140	37	175	150	10	175	230	125	56	24	M8 x 18	50	8	20	90	10	2-M25x1.5	2-PG16	340
TIM-5.5T2	190	41	230	181	12	220	290	140	70	28	M10 x 22	60	8	24	112	12	2-M32x1.5	2-PG21	400
TIM-7.5T2	216	51	260	186	15	259	338	140	89	38	M12 x 28	80	10	33	132	12	2-M32x1.5	2-PG21	483
TIM-10T2	216	51	260	186	15	259	338	140	89	38	M12 x 28	80	10	33	132	12	2-M32x1.5	2-PG21	483
TIM-15T2	254	55	320	260	18	315	420	210	108	42	M16 x 36	110	12	37	160	15	2-M40x1.5	2-PG29	615
TIM-20T2	254	55	320	260	18	315	420	210	108	42	M16 x 36	110	12	37	160	15	2-M40x1.5	2-PG29	615
TIM-25T2	254	55	320	304	18	315	420	254	108	42	M16 x 36	110	12	37	160	15	2-M40x1.5	2-PG29	658
TIM-1T4	125	35	165	125	9	155	215	100	50	19	M6 x 16	40	6	15.5	80	10	2-M20x1.5	2-PG16	287
TIM-1.5T4	140	37	175	125	10	175	230	100	56	24	M8 x 18	50	8	20	90	10	2-M25x1.5	2-PG16	315
TIM-2T4	140	37	175	150	10	175	230	125	56	24	M8 x 18	50	8	20	90	10	2-M25x1.5	2-PG16	340
TIM-3T4	160	40	200	172	11	196	260	140	63	28	M10 x 22	60	8	24	100	12	2-M32x1.5	2-PG21	385
TIM-5.5T4	190	41	230	181	12	220	290	140	70	28	M10 x 22	60	8	24	112	12	2-M32x1.5	2-PG21	400
TIM-7.5T4	216	51	260	186	15	259	338	140	89	38	M12 x 28	80	10	33	132	12	2-M32x1.5	2-PG21	483
TIM-10T4	216	51	260	186	15	259	338	178	89	38	M12 x 28	80	10	33	132	12	2-M32x1.5	2-PG21	510
TIM-15T4	254	55	320	260	18	315	420	210	108	42	M16 x 36	110	12	37	160	15	2-M40x1.5	2-PG29	615
TIM-20T4	254	55	320	304	18	315	420	254	108	42	M16 x 36	110	12	37	160	15	2-M40x1.5	2-PG29	660

Model	A	A/2	B	C	D	E	F	G	H	K	AB	AC	AD	HD	L	DH
TIM-25T4	279	139.5	241	121	48	110	14	42.5	180	15	355	355	280	455	700	M16 x 36
TIM-30T4	279	139.5	241	121	48	110	14	42.5	180	15	355	355	280	455	740	M16 x 36
TIM-40T4	316	158	305	133	55	110	18	49	200	19	395	397	305	505	770	M20x 42
TIM-50T4	356	178	349	149	60	140	18	53	225	19	435	445	335	580	815	M20x 42
TIM-60T4	356	178	311	149	60	140	18	53	225	19	435	445	335	580	845	M20x 42
TIM-75T4	406	203	349	168	65	140	18	58	250	24	490	485	370	615	920	M20x 42
TIM-100T4	457	228.5	368	190	75	140	20	67.5	280	24	550	547	410	680	995	M20x 42
TIM-150T4	457	228.5	368	190	75	140	20	67.5	280	24	550	547	410	680	995	M20x 42
TIM-200T4	457	228.5	368	190	75	140	20	67.5	280	24	550	547	410	680	995	M20x 42
TIM-250T4	457	228.5	368	190	75	140	20	67.5	280	24	550	547	410	680	995	M20x 42
TIM-300T4	457	228.5	368	190	75	140	20	67.5	280	24	550	547	410	680	995	M20x 42
TIM-400T4	457	228.5	368	190	75	140	20	67.5	280	24	550	547	410	680	995	M20x 42
TIM-500T4	457	228.5	368	190	75	140	20	67.5	280	24	550	547	410	680	995	M20x 42
TIM-600T4	457	228.5	368	190	75	140	20	67.5	280	24	550	547	410	680	995	M20x 42
TIM-750T4	457	228.5	368	190	75	140	20	67.5	280	24	550	547	410	680	995	M20x 42
TIM-1000T4	457	228.5	368	190	75	140	20	67.5	280	24	550	547	410	680	995	M20x 42

• IE2 and IE3 for Optimum Eff. • IP-55 and IP-56 are available on request

Motor Selection Chart

Model	HP	Kw	Voltage	RPM/SPEED
TIM-1.5S4	1.5	1.1	220	1400
TIM-2S4	2	1.5	220	1400
TIM-3S4	3	2.2	220	1400
TIM-1.5S2	1.5	1.1	220	2900
TIM-2S2	2	1.5	220	2900
TIM-3S2	3	2.2	220	2900
TIM-1T2	1	0.75	380	2900
TIM-1.5T2	1.5	1.1	380	2900
TIM-2T2	2	1.5	380	2900
TIM-3T2	3	2.2	380	2900
TIM-5.5T2	5.5	4	380	2900
TIM-7.5T2	7.5	5.5	380	2900
TIM-10T2	10	7.5	380	2900
TIM-15T2	15	11	380	2900
TIM-20T2	20	15	380	2900
TIM-25T2	25	18.5	380	2900
TIM-30T2	30	22	380	2900
TIM-40T2	40	30	380	2900
TIM-50T2	50	37	380	2900

Model	HP	Kw	Voltage	RPM/SPEED
TIM-60T2	60	45	380	2900
TIM-75T	75	56	380	2900
TIM-100T2	100	75	380	2900
TIM-1T4	1	0.75	380	1400
TIM-1.5T4	1.5	1.1	380	1400
TIM-2T4	2	1.5	380	1400
TIM-3T4	3	2.2	380	1400
TIM-5.5T4	5.5	4	380	1400
TIM-7.5T4	7.5	5.5	380	1400
TIM-10T4	10	7.5	380	1400
TIM-15T4	15	11	380	1400
TIM-20T4	20	16	380	1400
TIM-25T4	25	18.5	380	1400
TIM-30T4	30	22	380	1400
TIM-40T4	40	30	380	1400
TIM-50T4	50	37	380	1400
TIM-60T4	60	45	380	1400
TIM-75T4	75	56	380	1400
TIM-100T4	100	75	380	1400

VENTILATING FAN

Ceiling Mount Fan



Remote Control

Low Noise

Specification

- Integrated ceiling type for easier installation.
- Remote 3-speed control available.
- Ball bearing motor, long lifetime.
- With overheat protection.

Application

Home Office Commercial premises


Specification

Model	Power		RPM	Speed	Noise	Depth	Panel Size	Packing Size	Qty	Gross weight
	W	Air Volume m ³ /h								
MCF-D70	70	4200	1250	3	56	65	600×600	63×17.7×63.5	1	5.2

Dimension (mm)

Model	A	B	C	D
MCF-D70	598	95	160	65

Dimension



Window Mount Ventilating Fan



Gearing Type

Specification

- Pull rope type rear baffle design, can prevent outdoor air flow, mosquito enter.
- New design panel, large air volume, low noise.
- Simple structure, easy to install.
- Shaded pole motor.
- The service life is provided with over-heat protector.
- So it's safer to use.

Application

Bathroom Kitchen Bedroom Office


Specification

Model	Size		Power	Air Volume	RPM	Noise	Packing Size	Qty	Gross weight
	mm	in		m ³ /h	r/min		cm		
JMVFR-15	150	6	15	168	1950	38	66.9×33.1×46.4	18	16.5
JMVFR-20	200	8	25	324	1750	44	66×29×62.3	10	15.8

Dimension (mm)

Model	A	B	C	D	Hole Size
JMVFR-15	206	82	135	176	Ø185
JMVFR-20	272	103	185	238	Ø247

Dimension



Installation



Window Mount Ventilating Fan



Electrical Front Shutter Type

Specification

- Patented installation structure for easy installation indoors.
- 7-blade design for high air pressure.
- Built-in thermal cut-out protector for safer use.
- Electrical front non-return shutter to avoid mosquito come indoors which is suitable for high-rise buildings.
- Shaded pole motor.

Application

Bathroom Kitchen Bedroom Office


Specification

Model	Size		Power	Air Volume	RPM	Noise	Packing Size	Qty	Gross weight
	mm	in		m ³ /h	r/min		cm		
MVFS6-15	100	4	12	68.4	2050	46	69.5×34.3×37	20	16.1

Dimension (mm)

Model	A	B	C	D	Hole Size
MVFS6-15	160	43	60	99	Ø102

Dimension



Installation





TEXMO

MARKETING BY : MAJESTIC PRIDE INDUSTRY
INDIA - U.A.E - OMAN
www.mpgtc.com, E-mail : sales@mpgtc.com

TEXMO

FINOLEX

MAJESTIC